


UTAH-100/UDS

Configurable Distribution Amplifier

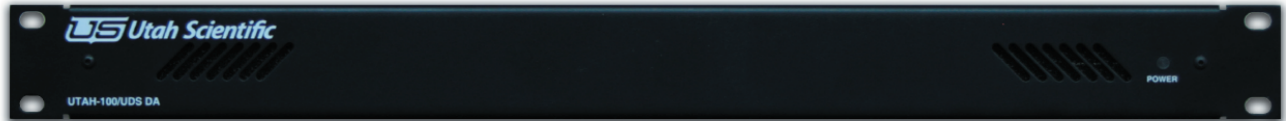

The UTAH-100/UDS DA configurable distribution amplifier offers multi-rate operation for use with all digital video formats, from Standard Definition to 3Gbps progressive HD, as well as DVB/ASI.

Each 1RU DA unit has 8 input ports and 32 output ports. Each output can be freely assigned to any of the input ports, giving this unit unmatched flexibility for use in permanent applications as well as mobile applications where signal distribution requirements may change frequently.

Control of the output port assignments is made through a Web interface that is supplied by the built-in UDS controller.

The DA uses standard BNC connectors for the input and output signals for quick, economical installation.

Power to the unit is provided by an external in-line power supply. Redundant power is an option.

DISTRIBUTION AMPLIFIER FEATURES

- COMPACT 1 RU PACKAGE
- UP TO 8 INPUTS, 32 ASSIGNABLE OUTPUTS
- BUILT-IN WEB SERVER FOR CONFIGURATION
- EXTERNAL POWER SUPPLY with OPTIONAL REDUNDANCY
- BNC CONNECTORS FOR I/O SIGNALS

www.utahscientific.com
E-mail: sales@utsci.com

4750 Wiley Post Way -- Suite 150
Salt Lake City, Utah 84116
Phone: +1 (801) 575-8801
Fax: +1 (801) 537-3099

Via Filli Bandiera, 52
20050 Verano Brianza (MI)
Italy
Phone: +39 0362 330 001

Thoroyaveien 11
3209 Sandefjord
Norway
Phone: +47 33 522 700