


HUBbox™ NV30-R17-R17

Dual Channel 3G-/HD-/SD-SDI Optical Receiver for SMPTE 297-2006 video applications

Data Sheet

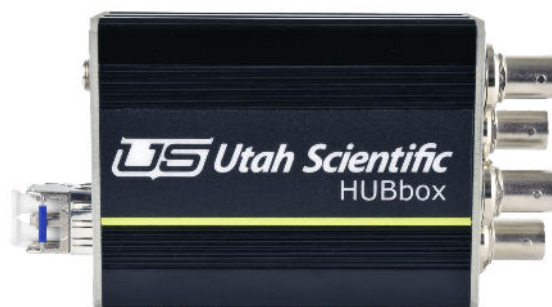

Description

Dual Optical Fiber to SDI converter supports 3G-/HD-/SD-SDI and DVB/ASI. Supports data rates from 2Mbps to 3Gbps.

The HUBbox™ comes equipped with AutoSFP® functionality, similar to the XFD line. This makes the HUBbox™ extremely flexible. Simply by replacing the SFP it can easily be changed into a dual receiver, dual transmitter or a transceiver. We've also added dual BNCs per channel to the design, allowing for dual outputs or loop-through.

It is housed in a compact and rugged aluminium case ideally suited to both studio and portable applications.

The HUBbox™ is perfect for using with an XFD system where one or two signals are required remotely.

Part Number Options

Part Number	Temperature
HUBbox NV30-R17-R17	-4°F to +131°F (-20°C to +55°C)

Features

- AutoSFP® functionality
- Dual output with reclocked SDI
- Multi-rate reclocking with automatic rate detection and automatic bypass for non-SDI data rates
- Automatic Cable Equalization
- LEDs display power and SDI lock status
- Locking DC jack
- Optical LC/PC connector
- PIN receiver technology
- Typical Link lengths at 2.97Gbps:
 - Up to 30km @ 9µm SMF
- Excellent performance with SDI-Checkfield test signal at SD-, HD- and 3G-SDI
- Use in conjunction with HUBbox™ NV30-T1310-T1310-05 or the XFD system for a complete fiber transmit/receive system

General Operating Conditions

Parameter	Minimum	Typical	Maximum	Unit
Operating temperature	-4		+131	°F
Supply voltage (Vcc)	11		27	V
Dimensions	2.5" x 3.3" x 1.2" (excluding connectors)			
Weight	0.31 lb (145g)			

Electrical Characteristics

Parameter	Minimum	Typical	Maximum	Unit
Supported standards:				
• SMPTE	292M-2008, 259M-2008, 297M-2006, 424M-2006			
• DVBAISI	EN50083-9			
• Laser safety	Class 1 21CFR and IEC60825-1			
Number of IN/OUT BNCs	2 (transmitter input or receiver output)			
Number of OUT BNC's	2 (transmitter loop-through or receiver output)			
Typical input cable length equalization	Up to 140m of Belden 1694A @ 2.97Gbps Up to 200m of Belden 1694A @1.485Gbps Up to 400m of Belden 1694A @270Mbps			
Output signal level	800mVp-p \pm 10%			
Connectors	BNC			
Impedance	75ohm			
Return loss	\geq 15 dB [5-1485 MHz], \geq 10dB [1485-2970MHz]			
LED Indicators	Power, SFP type and SDI lock			
Data rate	2		3000	Mbps

Receiver Optical Characteristics

Parameter	Minimum	Typical	Maximum	Unit
Transmitting circuit fiber	Single Mode (9/125 μ m), Multi Mode compatible			
Receiver technology	PIN			
Optical input overload power	-3			dBm
Optical receiver sensitivity @ 3Gbps (3G-SDI Checkfield, BER = 10^{-12} , TX _{EXT} \geq 7dB)		-20	-19	dBm
Optical receiver sensitivity @ 1.5Gbps (HD-SDI Checkfield, BER = 10^{-12} , TX _{EXT} \geq 7dB)		-22	-20	dBm
Optical receiving window	1260		1620	nm

All Rights Reserved. All trademarks are properties of their respective owners.
All prices and specifications are subject to change without notice.

Contact Us

Learn more at www.utahscientific.com



Email: info@utahscientific.com
Support: service@utahscientific.com
Sales: sales@utahscientific.com
Phone: 801.575.8801

Utah Scientific
 4750 Wiley Post Way, Suite 200
 Salt Lake City, Utah, 84116, USA
 U.S. and Canada Toll Free: 800.453.8782