




National Park Service Photo

HubBox HB-T1310-T1310

Dual-channel 3G-,HD-, SD-SDI Optical Transmitter for SMPTE 297-2006 Video Applications

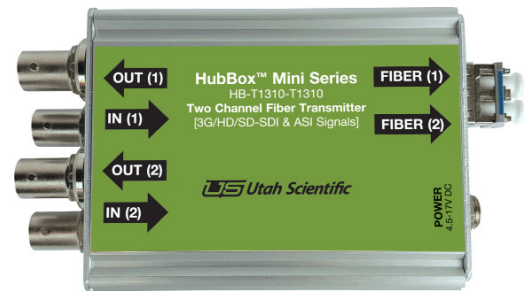

Dual-channel 3G-,HD-, SD-SDI Optical Transmitter for SMPTE 297-2006 Video Applications

The Utah Scientific HubBox HB-T1310-T1310 is an optical transmitter for converting dual SDI signals to optical fiber. The system supports 3G-, HD-, and SD-SDI as well as DVB/ASI, with support for data rates from 50Mbps to 3Gbps. The HB-T1310-T1310 is housed in an extremely compact and rugged aluminum case, making it ideal for both studio and portable applications.

The HB-T1310-T1310 is perfect for use with the Utah Scientific 100-XFD system to drive applications requiring one or two remote signals.



Features

- Multirate reclocking with automatic rate detection and automatic bypass for non-SDI data rates
- Automatic cable equalization
- LEDs displaying power and SDI lock status
- Locking DC jack
- Optical output on LC/PC connector
- Ability to provide reclocked loop-through SDI output
- Delivered with 1310nm Fabry-Perot laser
- Excellent performance with SDI-Checkfield test signal at SD-, HD-, and 3G-SDI
- May be used in conjunction with the Utah Scientific HB-R20-R20 or 100-XFD system to form a complete fiber transmit/receive system

Part Number Options

Part Number	Temperature
HB-T1310-T1310	0° C to +40° C

Absolute Maximum Ratings

Absolute maximum ratings are those values beyond which functional performance might be affected, device reliability is not implied, and damage to the device may occur.

Parameter	Minimum	Maximum	Unit
Storage temperature (non-operating)	-40	+85	°C
Relative humidity (non-condensing)	5	80	%

General Operating Conditions

Parameter	Minimum	Typical	Maximum	Unit
Operating temperature	0		+40	°C
Supply voltage (Vcc)	6		12	V
Dimensions	63.5mm x 84mm x 30mm (excluding connectors)			
Weight	145g			

Electrical Characteristics

Parameter	Minimum	Typical	Maximum	Unit
Supported standards:				
■ SMPTE	292M-2008, 259M-2008, 297M-2006, 424M-2006			
■ DVB ASI	EN50083-9			
■ Laser safety	Class 1 21CFR and IEC60825-1			
Number of inputs	2			
Number of outputs	2 active loop through			
Typical input cable length equalization	Up to 140m of Belden 1694A @ 2.97Gbps Up to 200m of Belden 1694A @1.485Gbps Up to 400m of Belden 1694A @270Mbps			
Output signal level	800mVp-p ±10%			
Connectors	BNC			
Impedance	75ohm			
Return loss	≥15 dB [5-1485 MHz], ≥10dB [1485-2970MHz]			
LED indicators	Power and SDI lock			
Data rate	50		3000	Mbps

Transmitter Optical Characteristics

Parameter	Minimum	Typical	Maximum	Unit
Transmitting circuit fiber	Single-mode (9/125 μ m), Multimode-compatible			
Light source	Fabry-Perot laser			
Optical output power	-6	-2.5	0	dBm
Optical extinction ratio	7			dB
Optical center wavelength	1280	1310	1340	nm
Spectral line width		1.5	3	nm
Optical rise/fall time (20-80%)		115	135	ps

Specifications are subject to change without notice

Utah Scientific
4750 Wiley Post Way, Suite 150
Salt Lake City, Utah, 84116, USA
Phone: 801.575.8801
U.S. and Canada Toll Free: 800.453.8782

Utah Scientific
Via F.lli Bandiera 52
20843 Verano Brianza (MB)
Italy
Phone: +39 0362 805778

www.utahscientific.com
sales@utahscientific.com